



**Weather & UV Resistant**  
(25 Year outdoor life)




**Halogen Free**



**External mounting system ensures IP level is not compromised**




**Flame Retardant**

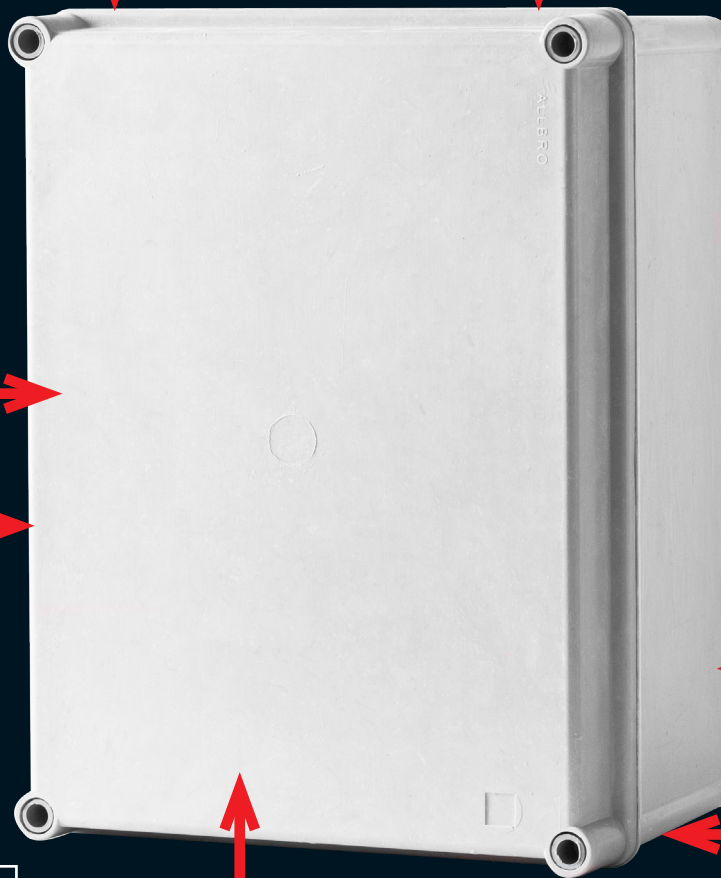

**External Hinges can be added**



**Durable GRP Material**



**Can be Colour Impregnated**



**Multiple boxes can be joined using "INT" Interconnectors**

<b>Material</b>	DMC (Dough Moulding Compound)			
<b>Operating Temperature</b>	+200°C on DMC lids and +110°C on Polycarbonate Lids			
<b>Glow Wire Capability / Flammability</b>	960° / UL94 V0			
<b>Expected UV Life (Direct Exposure)</b>	25 years +			
<b>IP Level</b>	IP68			
<b>IK Level</b>	IK9			
<b>Security Level</b>	1	2	3	4

Enclosures

Hinges

Locks

Handles

Accessories

Rotary Operating Handles

Insulators

Transformer Equipment

Index



Dimensions (mm)			Base (mm)	Lid (mm)	7035 RAL Base		Orange Base		Qty per box	Device Plate (Sold Separately)	
H	W	D	D	D	Grey Lid	Clear Lid	Orange Lid	Clear Lid		SMC Version	Powder Coated Mild Steel
					IP 68	IP 68	IP 68	IP 68			
186	151	135	90	45	OK0-G	OK0-GC	OK0-O	OK0-OC	4	OKM-0	OKM-0M
280	185	180	135	45	OK1-G	OK1-GC	OK1-O	OK1-OC	4	OKM-1	OKM-1M
280	280	180	135	45	OK2-G	OK2-GC	OK2-O	OK2-OC	2	OKM-2	OKM-2M
370	280	180	135	45	OK3-G	OK3-GC	OK3-O	OK3-OC	2	OKM-3	OKM-3M
560	370	180	135	45	OK4-G	OK4-GC	OK4-O	OK4-OC	1	OKM-4	OKM-4M



### Interconnectors

Part Number	Description
Q/INT1ORANGE	Okari 1 Interconnector Orange
Q/INT1GREY	Okari 1 Interconnector Grey
Q/INT2ORANGE	Okari 2 Interconnector Orange
Q/INT2GREY	Okari 2 Interconnector Grey
Q/INT3ORANGE	Okari 3 Interconnector Orange
Q/INT3GREY	Okari 3 Interconnector Grey

### Accessories

Part Number	Description
OKPH-G	DMC Hinge Set -Grey
OKPH-O	DMC Hinge Set -Orange
OKM-MS	Stainless Steel Mounting Brackets
OK-BP	Blind Plug
AE116	Cover Sealing Screws
OKARI-HAND	Handle

